



US007071829B2

(12) **United States Patent**
Gardner, Jr. et al.

(10) **Patent No.:** **US 7,071,829 B2**
(45) **Date of Patent:** **Jul. 4, 2006**

(54) **LIGHT EXTINCTION BASED
NON-DESTRUCTIVE FLYING INSECT
DETECTOR**

4,525,699 A 6/1985 Buck et al.
4,794,549 A * 12/1988 Van Albert et al. 340/573.1

(Continued)

(75) Inventors: **James P. Gardner, Jr.**, Stillwater, MN
(US); **David N. Demattia**, Lindstrom,
MN (US)

FOREIGN PATENT DOCUMENTS

EP 0 283 142 A1 9/1988

(Continued)

(73) Assignee: **Ecolab Inc.**, St. Paul, MN (US)

Primary Examiner—Thomas Mullen

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 169 days.

(74) *Attorney, Agent, or Firm*—Merchant & Gould P.C.

(57) **ABSTRACT**

(21) Appl. No.: **10/401,302**

A non-destructive flying insect detector is disclosed. The detector creates a sheet or curtain of light comprising a sensing zone and detects, by means of light extinction, individual flying insects that intersect the sensing zone. The sensing zone is created by a beam of light that enters the sensing zone area and is then bounced between opposing reflective surfaces. Preferably a laser is utilized to generate the beam of light. The beam of light leaves the sensing zone area and is incident on a light detection device (such as a photo cell) connected to an amplifier circuit. The light detection device monitors the light intensity and is arranged and configured to detect changes in the light intensity. The changes are electronically converted to a pest detection signal and/or to a flying insect count. Each flying pest detection signal may also be associated with other monitored data. For example, the time and date when the count occurred, the temperature, and the ambient light, among other parameters may be stored with the flying insect count(s). The stored data may be transmitted in real time, transmitted periodically, and/or collected with a PDA device or the like. The detector may be completely passive or it may provide an attractant for the flying insects—such as UV lamps. Further, the detector can act as a counter alone (e.g., as a flying insect monitor without a physical trap) or it can operate together with a trap. In the latter case, the flying insect may become entangled on a glue or sticky board lying beneath the light curtain and/or become eliminated by an electrical discharge device.

(22) Filed: **Mar. 26, 2003**

(65) **Prior Publication Data**

US 2003/0218543 A1 Nov. 27, 2003

Related U.S. Application Data

(60) Provisional application No. 60/428,480, filed on Nov. 22, 2002, provisional application No. 60/368,647, filed on Mar. 29, 2002.

(51) **Int. Cl.**
G08B 23/00 (2006.01)

(52) **U.S. Cl.** **340/573.2**; 43/107; 250/221;
340/556

(58) **Field of Classification Search** 340/573.2,
340/555-557; 43/107, 112, 114, 132.1;
250/221


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,637,931 A 5/1953 Sklar
3,843,924 A 10/1974 Wahlgren
3,992,803 A 11/1976 Kaiser
4,030,230 A 6/1977 Souza
4,040,046 A 8/1977 Long et al.
4,517,557 A 5/1985 Agron et al.

37 Claims, 4 Drawing Sheets

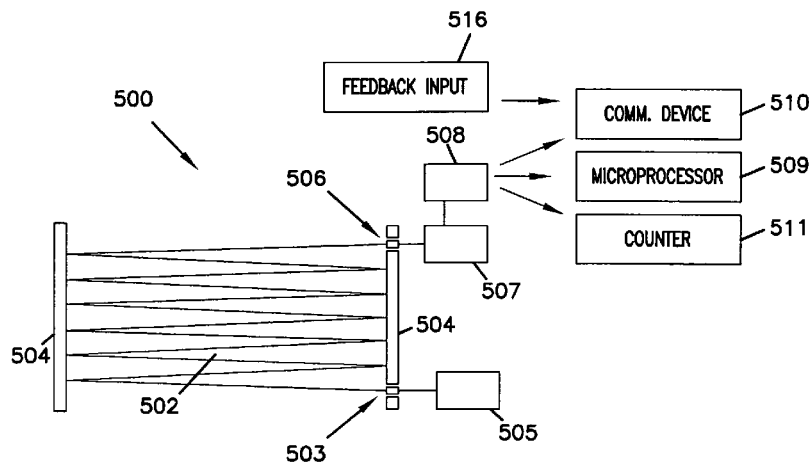

US 7,071,829 B2

Page 2

U.S. PATENT DOCUMENTS


4,862,145 A * 8/1989 Meehan et al. 340/573.2
4,884,064 A 11/1989 Meehan
5,005,416 A 4/1991 Vick et al.
5,040,326 A 8/1991 Van Dijnsen et al.
5,365,690 A 11/1994 Nelson et al.
5,392,732 A 2/1995 Fry
5,646,404 A * 7/1997 Litzkow et al. 250/338.1
5,815,090 A 9/1998 Su
6,052,066 A 4/2000 Su
6,313,643 B1 11/2001 Tirkel et al.
6,445,301 B1 9/2002 Farrell et al.
6,661,340 B1 12/2003 Saylor et al. 340/541
6,707,384 B1 3/2004 Shuman et al.
6,720,874 B1 4/2004 Fufido et al. 340/541
6,775,946 B1 * 8/2004 Wright 43/61
6,778,085 B1 8/2004 Faulkner et al. 340/541
6,792,395 B1 9/2004 Roberts
6,914,529 B1 7/2005 Barber et al. 43/124
6,922,940 B1 8/2005 Rollins 43/124
6,970,081 B1 11/2005 Cheng 340/541
2001/0054962 A1 12/2001 Barber et al.

2003/0160699 A1 8/2003 Trompen
2003/0210139 A1 11/2003 Brooks et al. 340/541
2004/0020100 A1 2/2004 O'Brien et al.
2004/0086089 A1 5/2004 Naidoo et al. 340/541

FOREIGN PATENT DOCUMENTS

EP 395135 A1 4/1990
JP 4-166033 B1 6/1992
JP 6-22671 B1 2/1994
JP 9-65812 B1 3/1997
JP 09094048 4/1997
JP 10-84834 B1 4/1998
JP 10099001 A * 4/1998
JP 2000060403 A * 2/2000
JP 2004-57147 B1 2/2004
JP 2004-129594 B1 4/2004
WO WO-2002/21912 A2 3/2002
WO WO-2002/26033 A1 4/2002
WO WO-2004/030450 A2 4/2004

* cited by examiner

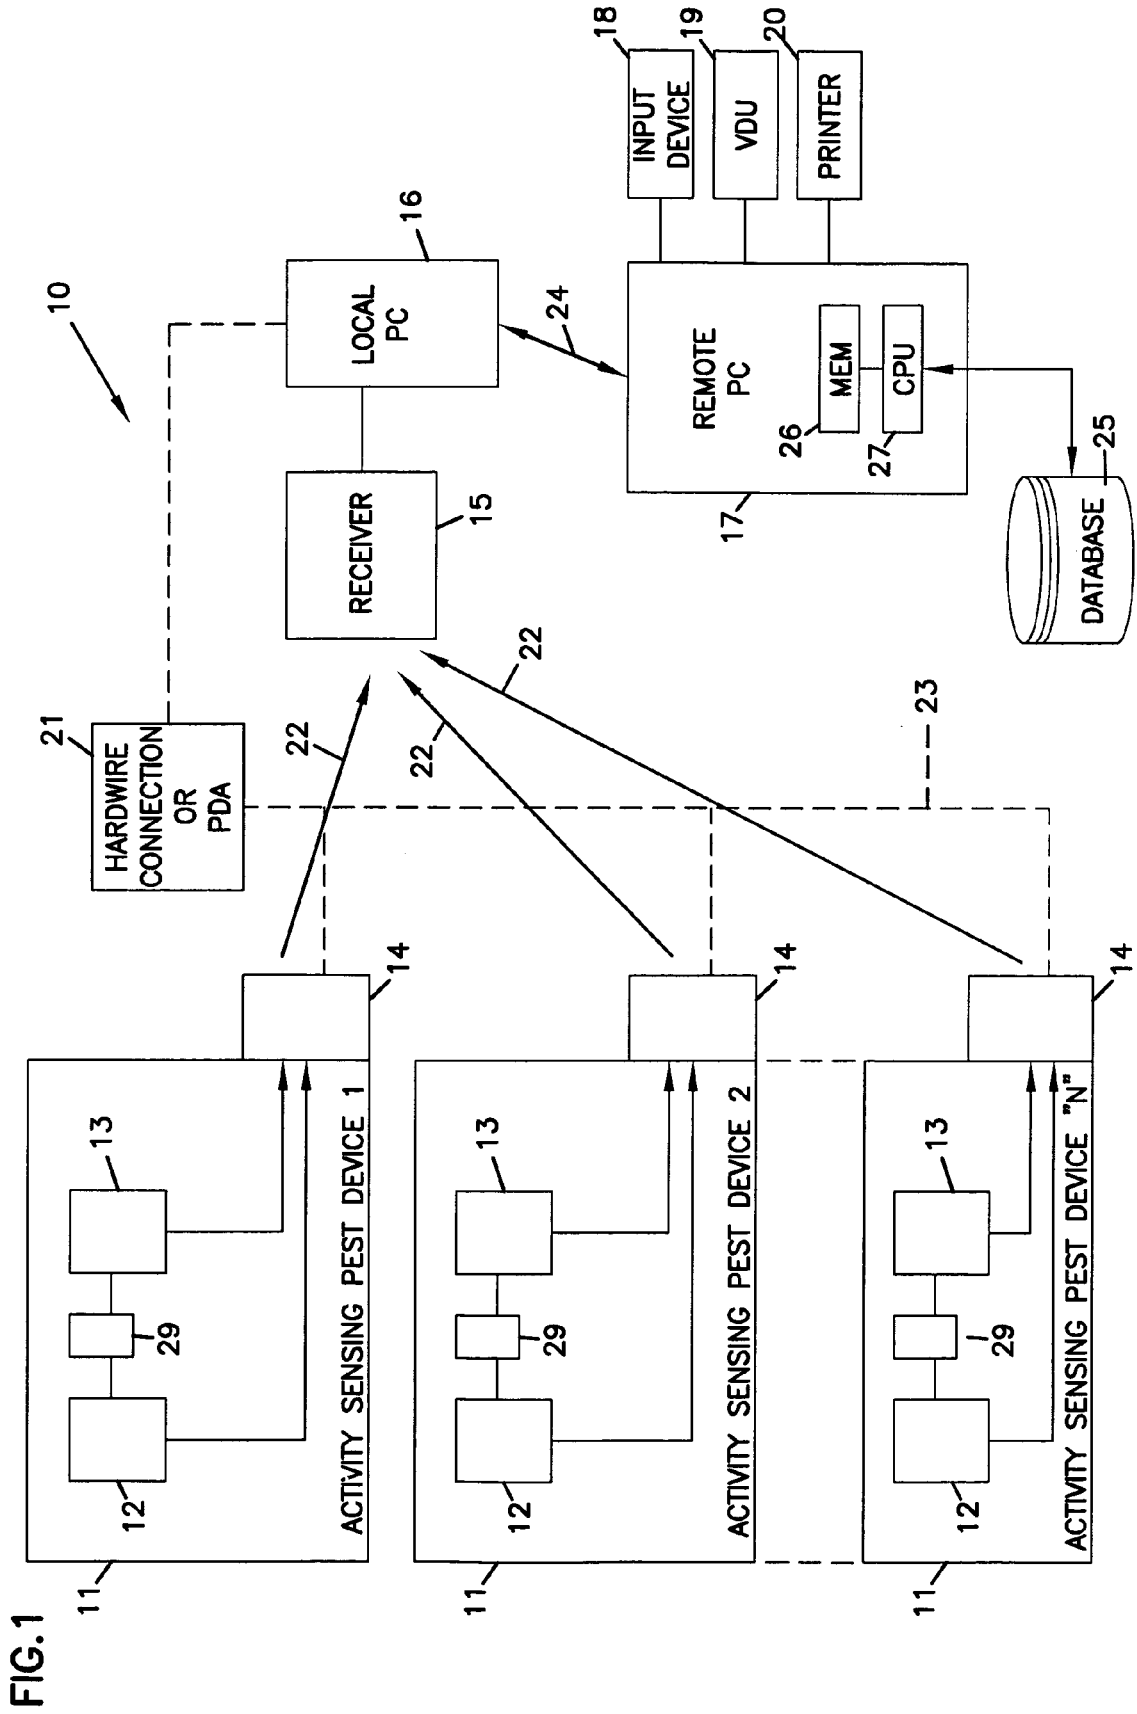

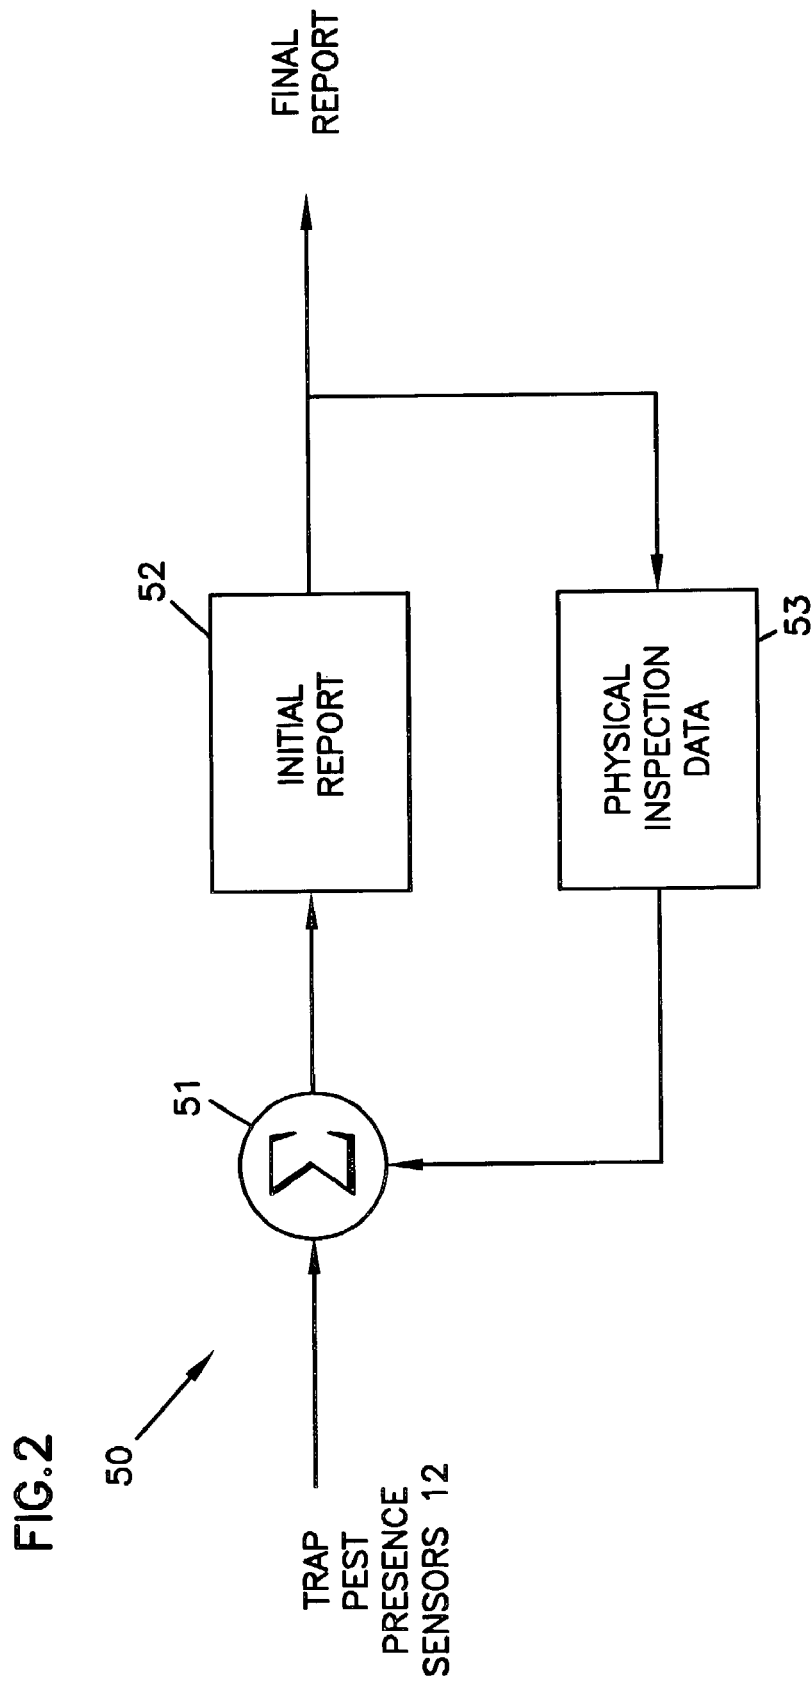


FIG.3A

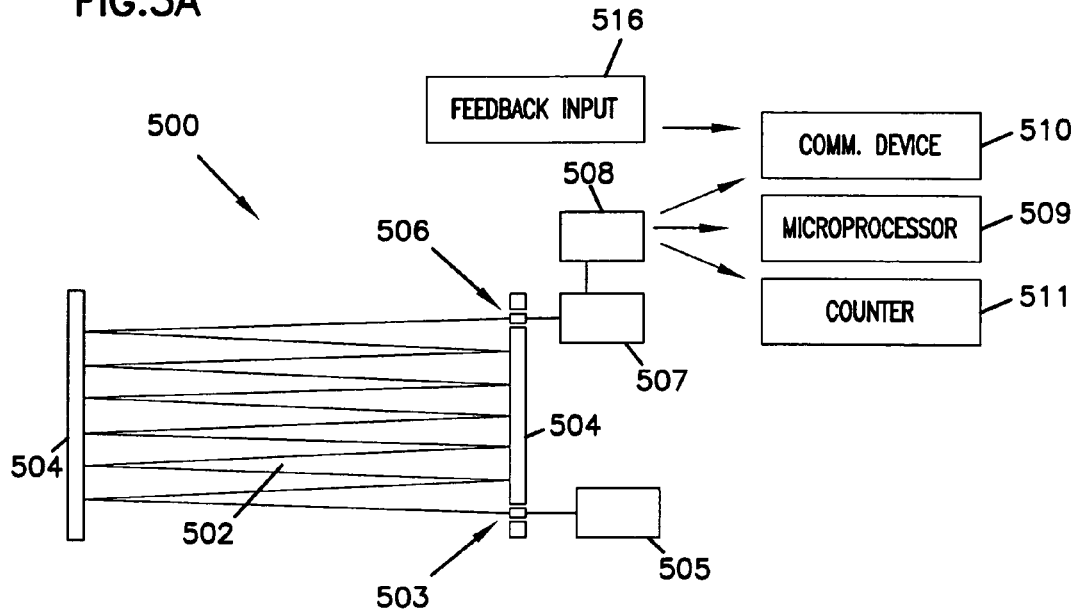


FIG.4

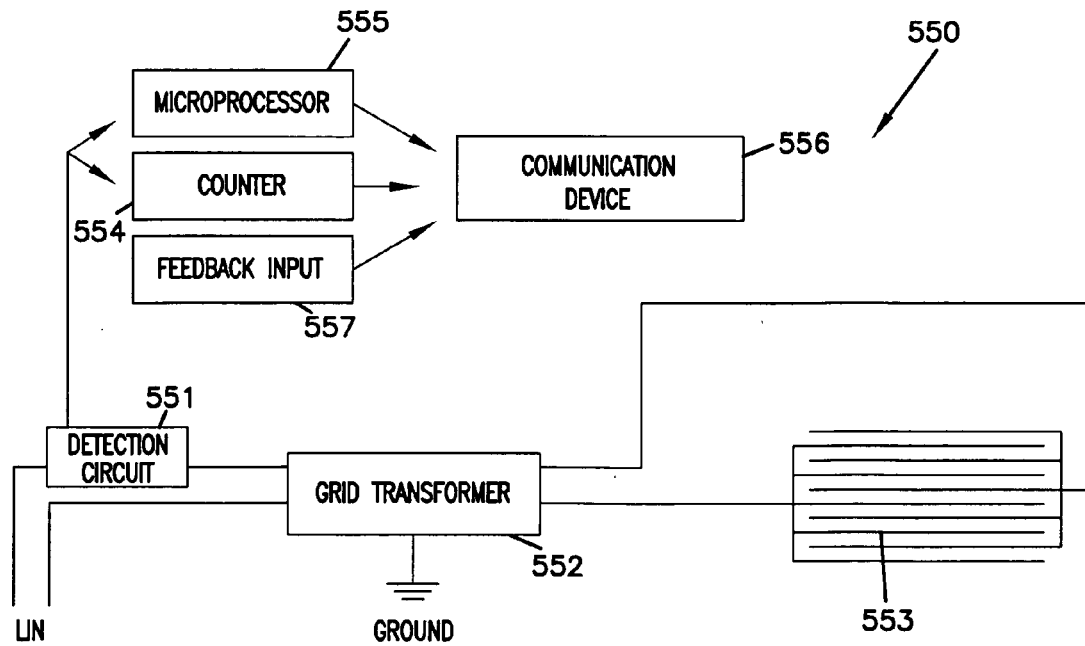


FIG.3B


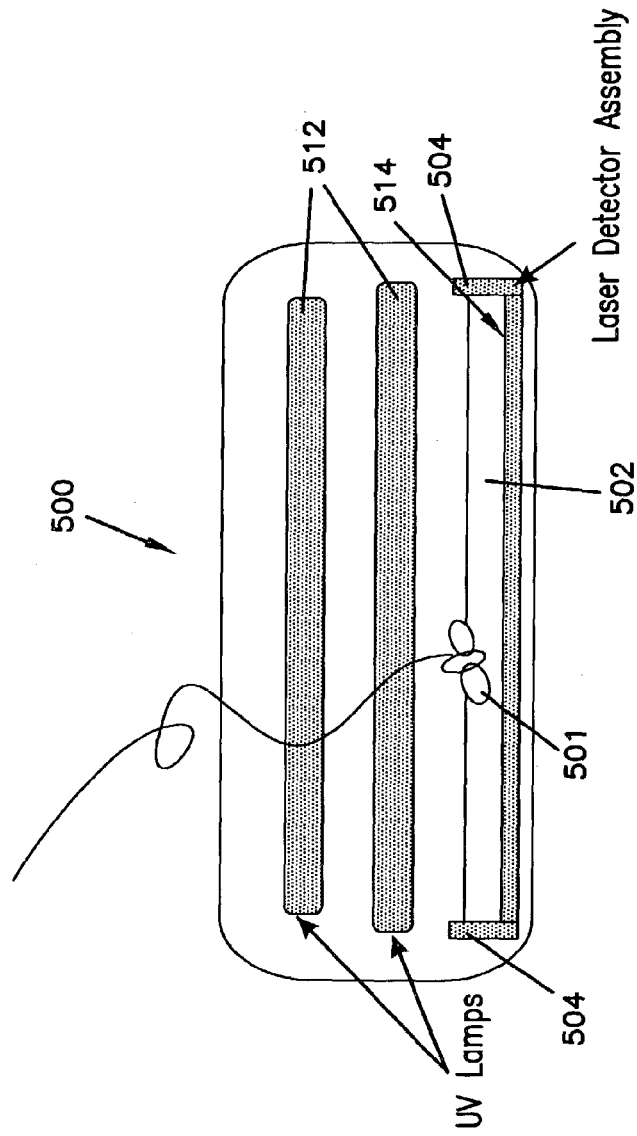


FIG.3C

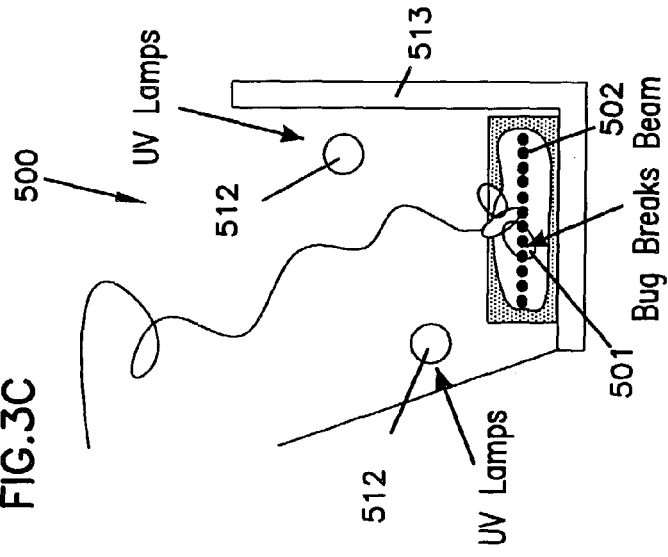

1

**LIGHT EXTINCTION BASED
NON-DESTRUCTIVE FLYING INSECT
DETECTOR**

This application claims priority from provisional appli- 5
cation Serial No. 60/428,480, filed Nov. 22, 2002 and
provisional application Serial No. 60/368,647, filed Mar. 29,
2002, and which are incorporated herein by reference.

FIELD OF THE INVENTION

This invention relates generally to the detection of insects;
and more particularly to a method and apparatus for the
detection of flying insects that intersect a sheet of light.

BACKGROUND

Rodents, flies, cockroaches, and other nuisance insects
and animals (hereafter referred to collectively as "pests")
create health concerns and introduce spoilage, among other
concerns. Many businesses deploy a variety of traps and/or
monitors throughout the business' physical premises and
facilities to insure a reduction and/or elimination of such
pests. These actions can be undertaken to insure inspection
compliance, to maintain sanitary conditions, reduce spoil- 20
age, comply with applicable laws and regulations, and/or
increase consumer confidence. Even upon complete elimi-
nation of pests from a physical site, however, the pests can
often find their way back into the premises. For example,
open doors, windows or loading docks, cracks in founda-
tions, delivery of contaminated materials or packaging, etc.,
may all provide an avenue for access back into the premises.
Therefore, even if the pests are reduced or eliminated, pest
traps are continuously used in order to detect the presence of
pest activity.

More specifically with regard to flying insects, there is a
need in the art to detect the presence of these pests. Spread-
ing large amounts of pesticides over broad areas to control
flying insects without regard to whether there are actually
insects in the area is undesirable. To reduce the risk of 40
inadvertent human contact with the pesticides, a more
directed application limited to those areas where the insects
are detected is preferable. Also, if traps are used in addition
to the pesticides (or in lieu of pesticides), there is a time cost
associated with checking each trap. Depending on the facil-
ity in which the insect control takes place, the presence of a
large number of traps can also be unsightly or inappropriate.
Therefore, detecting the number and location of the insects,
as well as determining the true source of the pest activity 50
(e.g., open doors, etc.), is advantageous since a targeted
pesticide application and/or trapping strategy can be devel-
oped.

Prior methods of detecting pests include utilizing a single
beam of light that is incident on a detector. This type of
application is typically found in environments where a
limited point of access is available—such as in a beehive
entrance. However, due to the limited entrance zone in
which pests will trip the light beam, this type of system has
significant drawbacks and will not work when an area needs
to be monitored. Another system employed in the prior art
to detect pests is thermal detection. One example is the IR
detection system disclosed in U.S. Pat. No. 6,445,301 issued
to Farrell et al. However, flying insects are not generally
sensed by such thermal systems. Accordingly, each of the
prior art systems has drawbacks in detecting flying insects. 65

The current flytraps used in pest control service employ
several methods of immobilizing flying insects. A service

2

technician during routine service cleans the trap and may
make a note of the extent of activity at the trap based on
visual inspection. This standard method of pest control
service has a number of limitations. Of primary importance
to customers and pest control companies is verifying that
technicians actually visited the trap and did not simply
conjure up false information. A second limitation is that
activity (i.e., a count of insects) is only trackable to the time
between services, such as monthly or weekly. Since the data
is not real-time activity, it cannot be broken down into daily
or hourly counts. This limitation prevents the implementa-
tion of proactive solution of problems (e.g., such as employ-
ees leaving doors open) and the targeted response to known
problems (e.g., such as discarding potentially contaminated
products based on pest activity). Therefore, there is a need
in the art to provide both real-time data logging and com-
munication of additional trap parameters (e.g., service activ-
ity).

Therefore, there is a need in the art for a flying insect
detecting system. Such a system would preferably be
arranged and configured to be used as either a passive
detector and/or as a part of a combined sensor and trap. The
device should also provide both real-time data logging and
communication of additional trap parameters (e.g., service
activity). The present invention overcomes the shortcomings
of the prior art and addresses these needs in the art.

SUMMARY

A preferred embodiment of an apparatus constructed
according to the principles of the present invention includes
a flying insect detector. The detector includes means for
creating a sheet or curtain of light comprising a sensing zone
and means for detecting, by means of light extinction,
individual flying insects that intersect the sensing zone. The
sensing zone is created by a beam of light which enters the
sensing zone area and is then bounced between opposing
reflective surfaces. In the preferred embodiment, a laser is
utilized to generate the beam of light. The beam of light
leaves the sensing zone area and is incident on a light
detection device (such as a photo cell) connected to an
amplifier circuit. The light detection device monitors the
light intensity and is arranged and configured to detect
changes in the light intensity.

When a flying insect enters into the sensing zone, a part
of the light forming the sensing zone is "blocked out" or
extinguished. When light is extinguished from a beam path,
a portion of the light is generally scattered and another
portion of the light is absorbed by the object (in this instance
a flying insect) in the beam path. Because the light incident
on the detector loses these two components (e.g., the scatter-
ed and absorbed light), the intensity of the light incident
on the detector is lowered. The light detection device detects
the lower light intensity and generates a flying pest detection
signal. Means are provided to electronically convert the
flying pest detection signal to a flying insect count. Means
may also optionally be provided to associate each flying pest
detection signal with other monitored data. For example, the
time and date when the count occurred, the temperature, and
the ambient light, among other parameters may be stored
with the flying insect count(s). The stored data may be
transmitted in real time, transmitted periodically, and/or
collected with a PDA device or the like.

Another feature of the present invention is the provision
of an optional sensitivity adjustment means to compensate
for the various devices into which the amplified signal from
the light detection device might be provided. For example,

a microprocessor, a transmitter, a manual input device and/or a counter block may be used together with the monitor.

Yet another feature of the present invention is that it may be completely passive or it may provide an attractant for the flying insects—such as UV lamps. Further, the present invention can act as a counter alone (e.g., as a flying insect monitor without a physical trap) or it can operate together with a trap. In the latter case, the flying insect may become entangled on a glue or sticky board lying beneath the light curtain and/or become eliminated by an electrical discharge device.

Therefore, according to one aspect of the present invention, there is provided a flying insect counter apparatus, comprising: a plurality of opposing reflective surfaces, the reflective surfaces having a first end and a second end; a light generation device arranged and configured to generate a beam of light, wherein the beam of light is reflected back and forth between the reflective surfaces from the first ends to the second ends to form a sensing zone between the reflective surfaces, whereby when flying insects intersect the sensing zone the flying insects cause changes in the light intensity of the beam of light; and a light intensity detection device, the beam of light operatively incident on the light intensity detection device after leaving the sensing zone, wherein the light intensity detector device detects flying insects as corresponding changes in the intensity of the beam of light.

According to another aspect of the invention, there is provided, a flying insect counter apparatus, comprising: a light generation device arranged and configured to generate a sheet of light, the sheet of light forming a sensing zone, whereby when flying insects intersect the sensing zone the flying insects cause changes in the light intensity of the sheet of light; and a light intensity detection device, the sheet of light operatively incident on the light intensity detection device after leaving the sensing zone, wherein the light intensity detector device detects flying insects as corresponding changes in the intensity of the sheet of light.

According to yet another aspect of the invention, there is provided a non-destructive flying insect counter, comprising: a laser diode to provide a focused beam; at least two opposing longitudinal reflecting members, the reflecting members being oriented relative to one another to reflect the beam incrementally along the longitudinal length of the reflecting members; and a photo cell, the photo cell arranged and configured such that the photo cell is in the path of the beam, wherein the photo cell detects the intensity of the focused beam, and whereby when a flying insect intersects the beam, then the intensity of the beam decreases and the photo cell generates a flying insect presence signal.

Yet another aspect of the invention provides for a method of detecting the presence of one or more flying insects by detecting changes in light intensity when a flying insect intersects a sensing zone, comprising: generating a source of collimated light; reflecting the light back and forth along the length of and between two reflective surfaces to establish a sensing zone; measuring the intensity of the light after leaving the sensing zone; and generating a flying insect detection signal when the intensity of the light decreases.

Other aspects of the present invention in accordance with the preceding paragraph include storing the flying insect detection signal and/or combining the flying insect detection signal with a real time indication of the time and date associated with the occurrence of the flying insect detection signal.

According to another aspect of the present invention, there is provided a pest reporting system, comprising: a pest report database; a plurality of light extinction based flying insect counters, the counters being arranged and configured to determine if a flying insect is in the area monitored by the counter and to generate a pest signal, manual input sensors associated with the flying insect counters, the sensors being arranged and configured to accept additional manual input; and a communication device, operatively connected to the flying insect counters and the manual input sensors, for receiving the pest signal and for communicating to the pest report database that a pest signal occurred and the specific activity sensing pest device at which the pest signal occurred, and wherein the pest report database is updated.

While the invention will be described with respect to preferred embodiment configurations and with respect to particular devices used therein, it will be understood that the invention is not to be construed as limited in any manner by either such configuration or components described herein. Also, while the particular types of flying insects and traps are described herein, it will be understood that such particular flying insects and traps are not to be construed in a limiting manner. Instead, the principles of this invention extend to any environment in which pest detection is desired. Further, while the preferred embodiments of the invention will be generally described in relation to use of a curtain or sheet of light, it will be understood that the scope of the invention is not to be so limited. These and other variations of the invention will become apparent to those skilled in the art upon a more detailed description of the invention.

The advantages and features which characterize the invention are pointed out with particularity in the claims annexed hereto and forming a part hereof. For a better understanding of the invention, however, reference should be had to the drawings which form a part hereof and to the accompanying descriptive matter, in which there is illustrated and described a preferred embodiment of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Referring to the drawings, wherein like numerals represent like parts throughout the several views:

FIG. 1 is a functional block diagram of an automatic pest control report generation with additional trap parameter data system.

FIG. 2 is a schematic diagram of the report generation process of the system of FIG. 1.

FIG. 3a schematically illustrates a functional block diagram of a fly counter with an optional trapping function constructed in accordance with the principles of the present invention.

FIG. 3b schematically illustrates a functional diagram of an exposed elevated side view of the fly counter of FIG. 3a.

FIG. 3c schematically illustrates a functional diagram of an exposed elevated end view of the fly counter of FIG. 3a.

FIG. 4 schematically illustrates a functional block diagram of a destructive electrocution insect light trap constructed in accordance with the principles of the present invention.

DETAILED DESCRIPTION

The principles of the present invention apply particularly well to its application to a flying insect detector. Although described herein in connection with flying insects, the invention is not so limited.

The detector **500** (best seen in FIGS. **3a-3c**) will be described in more detail below pending a discussion of the environment in which the present invention may be employed. However, a brief discussion of the principles of the present invention will first be presented.

Generally the present invention utilizes light extinction to detect flying insects that intersect a sensing zone. On either side of the sensing zone are first and second opposing reflecting surfaces—each of the reflecting surfaces includes a first and a second end. The sensing zone is therefore generally defined as that physical area located between the two opposing reflective surfaces and two imaginary surfaces. The first imaginary surface connects the first ends of the reflective surfaces and the second imaginary surface connects the second ends of the reflective surfaces. It will be appreciated, however, that the sensing zone may be limited to that area which is actually covered by the reflected beam as next described.

A beam of light enters the sensing zone proximate the first end of the second reflecting surface and strikes the first reflecting surface at a predetermined angle from the normal to the first reflecting surface. The beam then reflects back and forth between the two opposing reflective surfaces a predetermined number of times. As the beam propagates back and forth between the two reflecting surfaces it steps along the opposing reflective surfaces from the first ends to the second ends. In this manner the beam travels down the longitudinal length of the two reflective surfaces. The beam leaves the sensing zone proximate the second end of the second reflective surface. It will be appreciated to those of skill in the art upon review of the present disclosure, however, that the beam may enter and leave the sensing zone from either end and/or proximate (or in the area of) either reflecting surface without affecting the principles of operation of the present invention.

Preferably, the reflective surfaces are arranged and configured to keep the beam from diverging out of the sensing zone. By maintaining a tight beam shape, the intensity of the beam is maintained at the light intensity detector means until interrupted by a flying insect intersecting the sensing zone. When that occurs, light is extinguished from the beam path and the light intensity detector means senses the change in beam intensity.

As noted above, the present invention may be employed as a stand alone detector or as a combined detector and trap. Further, the present invention can be used by itself or can be utilized in a larger detection and trapping environment. Accordingly, a detailed discussion of the flying insect detector method and apparatus will now be deferred pending a discussion of an automatic pest trap report generation and additional trap parameter data logging environment in which the present invention may be employed.

Automatic Pest Trap Report Generation and Additional Trap Parameter Data Logging Environment

First referring to FIG. **1**, a functional block diagram of the automatic pest report generation system and additional pest trap and pest monitor parameter data is provided. The system is shown generally by the designation **10**. A plurality of activity sensing pest devices are shown at the designation **11**. Any number of “n” activity sensing pest devices **11** may be utilized in connection with the present invention. The automatic pest trap report generation and additional trap parameter data logging environment system may include a variety of styles of activity sensing pest detectors. In the case of traps, each of the n traps **11** include a pest enclosing, retaining or killing device (best seen in FIG. **4** and discussed

further below). As discussed above, one or more of the activity sensing pest devices **11** can also take the form of a passive or active pest monitor—which monitor may or may not include a trapping device. A pest sensor **12**, a physical inspection data entry device **13**, and a communication block **14** are also provided.

Pest sensor **12** may take a number of forms, but in each form generally monitors pest activity in and/or about the trap **11**. Examples of the pest sensor **12** include a switch or mercury switch (for monitoring movement of the trap), a capacitance device (for monitoring a pest altering the capacitance of a grid), a current monitoring device (for detecting current spikes in a destructive or electrocution style trap), or light extinction of a light source (for monitoring an interrupted beam or laser). The sensor **12** is generally located in or on the pest trap **11**. However, it is possible to also locate the pest sensor **12** adjacent or proximate the trap **11**. It will be appreciated that sensor **12** may be located in an area without a trap being present. In this latter case, the sensor **12** acts as a pest monitor for that area. When pest activity is detected and a pest presence or detection signal is generated by the sensor **12**, the pest presence signal is provided to the communication block **14**.

The communication block **14** may take a number of forms. For example, the communication block may communicate over a fixed wire (e.g., to hardwire receiver **21** via optional connection **23**) or by telephone or cellular phone, it may take advantage of putting signals over existing wiring in a building, or it may utilize over-the-air transmissions designated as **22**. In each of these forms, the communication block **14** operates to pass the pest presence or detection signal—as a pest event—to a receiver **15** (or alternatively directly to local PC **16**). In one embodiment, an RF type communication device is utilized. In this type of embodiment, the receiver **15** will generally be located relatively close to the transmitter device in communication block **14**. However, the range is affected by, among other factors, the type of RF device used and by the structural characteristics of the facility or area. If appropriate communication schemes are utilized, then the receiver **15** may be located off-site. In a second preferred embodiment, a PDA device **21** is utilized to gather the data. In this case, either a cradle (not shown), an IR based connection, or other communication path (shown generally as optional connection **23**) may be used.

Sensor **12** may include a memory device or other data storage to accumulate event data and then pass along a block of information to the communication device. For example, sensor **12** may be constructed to archive pest presence signals in an onboard memory location or in a separate memory device **29**. The later communication of the stored data may occur at set intervals, may be prompted by a polling transaction, or may be physically activated by an inspector via a personal computer, special purpose computing device, or PDA **21**. By storing the data, any number of pest detection events may be transmitted as a block.

For example, in one embodiment (best seen in FIG. **3a** and discussed in more detail below) the sensor may archive event data in the counter block **511**. The counter block **511** can include an electronic memory storage location, and can optionally include a visually perceptible means for displaying the data such as an LCD display or mechanical counter (not shown). The microprocessor block **509** can initiate transmission of the collected data via communications block **510**. This can take the form of a PDA **21** establishing contact with the communications block **510** or take another of the

forms identified above. The data can be passed as individual event data or as histograms of the number of events within different time windows.

The sensor **12** provides data on the activity sensing pest devices **11** identifier code, the time of the event, and the event itself. However, the PDA **21**, the receiver **15** or local computer **16** (discussed below) may provide a date stamp for the received pest event. Unless the context provides otherwise, for convenience it will be assumed that the methodology utilized to transmit the data from the sensor is an RF system. Those skilled in the art, however, will appreciate that other methodologies described herein and equivalents may be employed to implement such communication.

Once the event is transmitted to receiver **15**, the data is provided to local computer **16**. Computer **16** may be a special purpose computing device or may be a personal computer (e.g., an IBM compatible computer having a Pentium style chip). The data is in turn provided to remote personal computer **17** over the internet or direct connection **24**. Computer **17** includes a processor **27**, input devices **18** (e.g., keyboard and mouse or other pointing device), video display unit **19**, and a printer **20**. CPU **27** is provided to run a database program stored in memory **26**. The program may also be running from a hard drive, floppy drive, CD-ROM, or from a server or other computer on a network machine. The database **25** is stored in memory **26**. It will be appreciated that the database may also be stored on a local area network server, hard drive, cd-rom drive or other storage device accessible by the CPU **27**.

Database **25** stores the event data and includes other database functions, such as relating events to pest trap identification numbers, and generating reports, among others. A number of commercially available relational database programs may be used capable of storing and relating fields in a number of records. A report writing capability is also desirable. The received data from the various activity sensing pest devices **11** must be recognized by the computer **17** and stored in the database **25**. The database **25** can reside on local computer **16** with reports being generated locally and, optionally, transmitted to other computers via a network, extranet or internet.

In the database **25**, the activity associated with each activity sensing pest devices **11** may be tracked by the unique ID number. The facility of interest contains any desired number of activity sensing pest devices **11** and the location of the activity sensing pest devices **11** are maintained with the unique ID number to be used in the reporting process. Desirable reports include trap activity data for a specific trap, the activity of traps which have initiated pest presence signals (and other traps which should be visited according to some determined schedule), a summary report with additional trap parameter data added following a physical inspection of the trap(s) and a summary report for each of the traps.

In order to provide the feedback information, each activity sensing pest device **11** also preferably includes one or more feedback devices **13** which permit an inspector to provide physical trap and monitor parameter feedback at the actual location of the activity sensing pest devices **11**. This additional data is preferably input to the database **25** running on computer **17** (via the communication block **14** to receiver **15** to local computer **16**). The feedback device **13** may take the form of one or more buttons; a keypad; a keyboard; one or more dipswitches; an infrared receiver which is configured to interact with a PDA **21** (e.g., of the type sold under the designation Palm Pilot or other personal data device), or any other input device allowing selection among a plurality of

parameter ID's such as those set forth in Table I below. In the discussion of various embodiments, the feedback device **13** is also referred to herein as physical inspection data entry device **13** and additional trap parameter input means **13**. In each case, the device **13** allows an inspector to indicate a particular parameter, from among a predetermined set of parameters. For example, an inspector could indicate that a trap was inspected and no animal was found or that the trap was inspected and an animal was found. Table I includes a representative list of codes which may be utilized by a trap inspector.

TABLE I

Parameter ID	Parameter Description
1	Trap Checked - No Activity
2	Trap Checked - Activity Type 1 Found
3	Trap Checked - Activity Type 2 Found
4	Trap Checked - Activity Type 3 Found
5	Trap Cleaned
6	Trap Out of Place
7	Trap Damaged
8	Light Bulb Replaced
9	Glueboard Replaced
10	Cover Opened

It will be appreciated that the trap parameter/data is exemplary and other information may be provided. Further, the Parameter ID number is assigned arbitrarily above. In other systems, the parameter ID number may be associated with other trap parameters.

The feedback data can alternatively be entered directly into local computer **16** by an operator after physically inspecting the traps. The data might also be temporarily stored during the inspection in a PDA **21** or other special computing device, and subsequently downloaded into computer **16**. In these embodiments, it will be appreciated that the input block **13**, communication block **14** and receiver block **15** may be modified to function properly with the data gathering methodology employed. However, transmission of initial data on pest activity is preferred in order to generate an initial report (for example visits to the appropriate activity sensing pest devices can then be determined).

Preferably each activity sensing pest device **11** includes a feedback mechanism **13**. Due to the characteristics of the physical premises, the costs, the benefits from the individual activity sensing pest device **11**, and other factors, one or more of the activity sensing pest devices **11** may not include a feedback sensor **13**. However, in view of the advantages provided by the feedback reporting system as described herein, it will be appreciated that the benefits increase as the amount and quality of the feedback data increases.

Once transmitted to the database **25**, the additional parameter data on the activity sensing pest devices is also tracked against the appropriate ID number. This results in a refining of both the data and the resulting reports from database **25**. The activity sensing pest devices reporting becomes a feedback loop as illustrated in FIG. 2 by the designation **50**. In FIG. 2 the sensors **12** provide data to summing block **51** and to initial report block **52**. The physical inspection component of the process includes reviewing the initial report(s) **52** and providing additional physical inspection data at block **53**. The physical inspection data can include data on each trap and monitor **11**. However, preferably the data is for a smaller set of traps and monitors, which include those traps and monitors that generated a pest activity event signal and a

number or percentage of the remaining traps and monitors of the “n” activity sensing pest devices **11** in the facility that did not show any pest activity.

The feedback loop provides data on false positives, disturbed traps, and other factors. The time data corresponding to when the pest activity occurs helps to proactively determine pest infiltration factors and/or information relating to maintaining an optimum pest control plan, such as disturbed traps, etc.

The various styles of traps **11** may include a large variety of commercially available traps for trapping any type of animal, such as rodents or insects. Examples of commercially available live animal/rodent traps are the Victor M310 Tin Cat; the Havahart Live Traps; the Kwik Katch Mouse Trap, and the Kness Ketch-All. Examples of commercially available zapping light traps are the Gardner AG2001; the Gardner AG-661 Light Trap, and the Anderson Adhesive Insect Light Trap. Examples of commercially available glueboard light traps are the Ecolab Stealth Unit; the Gardner WS25; the Gardner GT100, and the Anderson Adhesive Insect Light Traps.

Non-Destructive Flying Insect Counter

FIGS. *3a* through *3c* illustrate a non-destructive flying insect counter or detector, while FIG. **4** illustrates a destructive flying insect trap which may be employed in connection with the non-destructive insect counter. The counter **500** includes a curtain of light made up of a beam **502** which is bounced between reflective surfaces **504**. Alternatively, the curtain (or sheet) of light may be generated by a lens, one or more focusing devices, and/or other light generating source(s). Such curtain may not be required to be completely continuous (e.g., gaps in the continuity of the sheet may exist within the sensing zone). However, any gaps will preferably be designed to be of a size and shape wherein pests moving through the sensing zone do not avoid detection.

In the preferred embodiment, a laser **503** (such as a class III-A laser diode) is utilized with a laser power supply **505**. The power supply **505** is preferably a plurality of N-cell 1.5 volt batteries. Other power sources and types of lasers (and/or collimated light) can be used. Other light sources with collimating lenses (not shown) might also be used. The laser beam terminates at the light detection means, preferably a photo cell **506**. However, other devices which function to detect changes in light intensity might also be used. The photocell **506** is connected to amplifier circuit block **507**. A sensitivity adjustment block **508** is included to compensate for the various devices into which the amplified signal from the photo cell might be provided. In the preferred embodiment, a read relay coil switch is used. The other various devices can include a microprocessor **509**, a transmitter **510** (which may be used as a transmitter **14**), manual input device (feedback mechanism) **516**, and/or a counter block **511**. Manual input device **516** may be used as the additional trap parameter input means **13**.

When a flying insect **501** enters into the beam of light **502**, a part of the light is extinguished. The photocell **506** detects the lower light intensity. Therefore, the light curtain may be used as a pest monitor or sensor **12**. The amplifier circuit block **507** and sensitivity adjustment block **508** provide the pest activity signal to transmitter block **510** (and/or other blocks **509** and **511**). The flying insects **501** are attracted by UV lamps **512** or other attractant. The device can operate as a counter alone (e.g., as a pest monitor without a physical trap) or it can operate as a trap. In the latter case, the flying insect may become entangled on a glue or sticky board **514**

lying beneath the light curtain and/or become eliminated by electrical discharge device (not shown). A housing **513** mounts the various components of the trap.

By non-destructive what is meant is that the object and/or function of the trap is restraining, detaining or trapping. Destructive traps generally include a killing function whereby the pest is disfigured, dismembered, electrocuted and/or otherwise undergoes an extreme physical change.

FIG. **4** illustrates an electrical-discharge insect-control system **550** with an event monitoring circuit **551**. The trap **550** kills insects by discharging electricity from a transformer **552** through the insect when it approaches the electrified grid **553**. The insect reduces the air gap between the electrodes of the grid, allowing breakdown to occur in the air and electrical current to flow through the insect and air. The current flows during the short period of time in which the insect is in the vicinity of the grid and kills the insect. The trap **550** includes a sensing circuit **551** to monitor for a pest event (e.g., when an insect is in the vicinity of the grid **553**). When the current flows, the circuit detects the transient signal as the system is activated and supplies this signal to a counter **554** and/or microprocessor **555** for compilation of event data. This data can then be transmitted by a transmitter device **556** for further analysis. Feedback information may also be supplied for transmission via the feedback device **557** by the user of the system.

It will be appreciated that the principles of this invention apply not only to detecting flying insects, but also to the method of detecting the insects, as well as collecting pest monitoring and/or trap data. While particular embodiments of the invention have been described with respect to its application, it will be understood by those skilled in the art that the invention is not limited by such application or embodiment or the particular components disclosed and described herein. It will be appreciated by those skilled in the art that other components that embody the principles of this invention and other applications therefor other than as described herein can be configured within the spirit and intent of this invention. The arrangement described herein is provided as only one example of an embodiment that incorporates and practices the principles of this invention. Other modifications and alterations are well within the knowledge of those skilled in the art and are to be included within the broad scope of the appended claims.

What is claimed is:

1. A flying insect counter apparatus, comprising:

- a) a plurality of opposing reflective surfaces, the reflective surfaces having a first end and a second end;
- b) a light generation device arranged and configured to generate a beam of light, wherein the beam of light is reflected back and forth between the reflective surfaces from the first ends to the second ends to form a sensing zone between the reflective surfaces, whereby when flying insects intersect the sensing zone the flying insects cause changes in the light intensity of the beam of light; and
- c) a light intensity detection device, the beam of light operatively incident on the light intensity detection device after leaving the sensing zone, wherein the light intensity detection device detects flying insects as corresponding changes in the intensity of the beam of light.

2. The apparatus of claim **1**, wherein the light intensity detection device generates a flying insect presence signal when the beam of light incident on the light intensity detection device changes.

11

3. The apparatus of claim 2, wherein the light intensity detection device generates a flying insect presence signal only when the beam of light incident on the light intensity detection device decreases.

4. The apparatus of claim 1, further comprising a data logger device arranged and configured to accept and store insect presence signals.

5. The apparatus of claim 4, wherein the data logger device is arranged and configured to keep time and to provide real time clock signals and associate the signals with the insect presence signals, whereby the time the insect crosses the path is preserved and the information is stored in close proximity to when the event occurred.

6. The apparatus of claim 5, further comprising sensors arranged and configured to accept additional manual input.

7. The apparatus of claim 6, wherein the manual input includes data on the condition of the apparatus when it is inspected.

8. The apparatus of claim 1, further comprising a trapping element.

9. The apparatus of claim 8, wherein the trapping element is a glue board.

10. The apparatus of claim 9, wherein the attractant is a U.V. light.

11. The apparatus of claim 8, wherein the trapping element is an electrocution grid.

12. The apparatus of claim 1, further comprising an attractant.

13. The apparatus of claim 1, further comprising an attractant and a trapping element.

14. The apparatus of claim 13, wherein the trapping element is a glue board and the attractant is a (U.V. light).

15. A flying insect counter apparatus, comprising:

a) a light generation device arranged and configured to generate a sheet of light, the sheet of light forming a sensing zone, whereby when flying insects intersect the sensing zone the flying insects cause changes in the light intensity of the sheet of light; and

b) a light intensity detection device, the sheet of light operatively incident on the light intensity detection device after leaving the sensing zone, wherein the light intensity detection device detects flying insects as corresponding changes in the intensity of the sheet of light.

16. The apparatus of claim 15, wherein the light intensity detection device generates a flying insect presence signal when the sheet of light incident on the light intensity detection device changes.

17. The apparatus of claim 16, wherein the light intensity detection device generates a flying insect presence signal only when the sheet of light incident on the light intensity detection device decreases.

18. The apparatus of claim 15, further comprising a data logger device arranged and configured to accept and store insect presence signals.

19. The apparatus of claim 18, wherein the data logger device is arranged and configured to keep time and to provide real time clock signals and associate the signals with the insect presence signals, whereby the time the insect crosses the path is preserved and the information is stored in close proximity to when the event occurred.

20. The apparatus of claim 19, further comprising sensors arranged and configured to accept additional manual input.

21. The apparatus of claim 20, wherein the manual input includes data on the condition of the apparatus when it is inspected.

22. The apparatus of claim 15 further comprising a trapping element.

12

23. The apparatus of claim 22, wherein the trapping element is a glue board.

24. The apparatus of claim 22, wherein the trapping element is an electrocution grid.

25. The apparatus of claim 15, further comprising an attractant.

26. The apparatus of claim 25, wherein the attractant is a U.V. light.

27. The apparatus of claim 15 further comprising an attractant and a trapping element.

28. The apparatus of claim 27, wherein the trapping element is a glue board and the attractant is a U.V. light.

29. A non-destructive flying insect counter, comprising:

a) a laser diode to provide a focused beam;

b) at least two opposing longitudinal reflecting members, the reflecting members being oriented relative to one another to reflect the beam incrementally along the longitudinal length of the reflecting members; and

c) a photo cell, the photo cell arranged and configured such that the photo cell is in the path of the beam, wherein the photo cell detects the intensity of the focused beam, and whereby when a flying insect intersects the beam, then the intensity of the beam decreases and the photo cell generates a flying insect presence signal.

30. The counter of claim 29, further comprising event storing means, operatively connected to the photo cell, for storing the number of flying insect presence signals as events, the event storing means arranged and configured to store each event with an indication of the time and date at which the event occurred.

31. The counter of claim 30, further comprising a sensitivity adjustment means connected between the photo cell and the event storing means.

32. A method of detecting the presence of one or more flying insects by detecting changes in light intensity when a flying insect intersects a sensing zone, comprising:

a) generating a source of collimated light;

b) reflecting the light back and forth along the length of and between two reflective surfaces to establish a sensing zone;

c) measuring the intensity of the light exiting the sensing zone; and

d) generating a flying insect detection signal when the intensity of the light decreases.

33. The method of claim 32, further including the step of storing the flying insect detection signal.

34. The method of claim 33, further including the step of combining the flying insect detection signal with an indication of the time and date associated with the occurrence of the flying insect detection signal.

35. A pest reporting system, comprising:

a) a pest report database;

b) a plurality of light extinction based flying insect counters, the counters being arranged and configured to determine if a flying insect is in the area monitored by the counter and to generate a pest signal,

c) manual input sensors associated with the flying insect counters, the sensors being arranged and configured to accept additional manual input; and

d) a communication device, operatively connected to the flying insect counters and the manual input sensors, for receiving the pest signal and for communicating to the pest report database that a pest signal occurred and the specific flying insect counters at which the pest signal occurred, and wherein the pest report database is updated.

13

36. The pest reporting system of claim **35**, wherein one or more of the flying insect counters include a trap element.

37. The pest reporting system of claim **35**, wherein the flying insect counter includes a light beam and a sensor for detecting the intensity of the light beam, wherein when a

14

flying insect flies through the beam, the light intensity decreases and the sensor detects the decreased light intensity as a pest event.

* * * * *